

HIGH CURRENT PROBES

1860C010

NEW

**High Current Probe 256 mil
Solder Tight, Robust Version
up to 50 A, Plug-in**

Centers (mm/mil)	6,50 / 256
Current	50,0 A
R typ	<6 mOhm
Temperature	-40°C...+200°C (H)

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	120	400

Travel (mm)

Version	Nominal	Maximum
Standard	4,8	7,0
Pointing Accuracy		±0,08 mm

Materials and Plating

Plunger	Brass, gold plated
Barrel	Brass, gold plated
Spring	Stainless steel, unplated
Receptacle	Brass, gold plated

Accessories


Insertion tool probe	FDWZ-650
----------------------	----------

Drill Size (mm)

1860C010	4,98 - 5,01
H650RD	5,61 - 5,63


Projection Height (mm)

1860C010 in H650RD	9,0
--------------------	-----

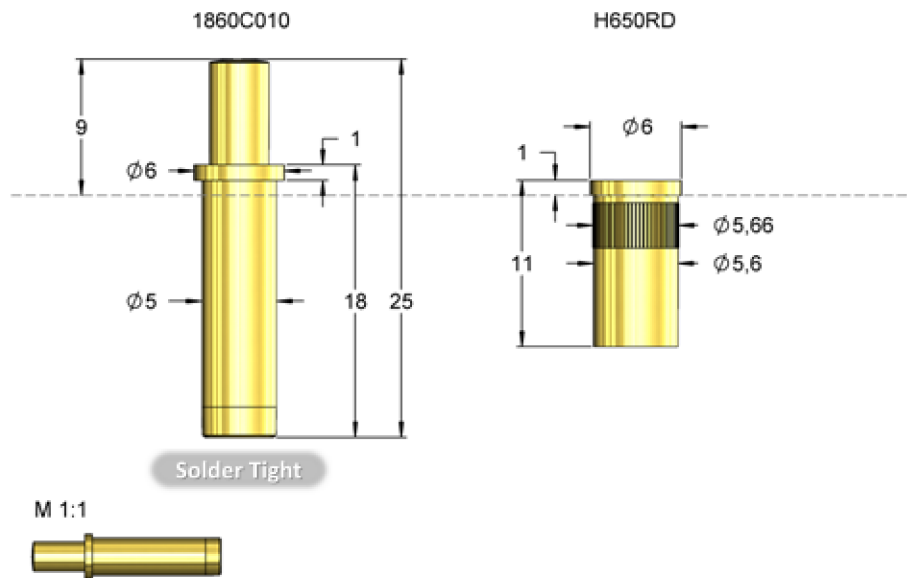

Design with standard plunger



Order Code	Tip Style	Number	Material	Ø in mm	Plating	Version
1860C010		11	M	4,00	G	G