

FINE PITCH PROBES

F025

NEW

Probe 30 mil Standard

Centers (mm/mil)	0,60 / 25
Current	1,5 A
R typ	150 mOhm
Temperature	-45°C...+100°C

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	10	40

Travel (mm)

Version	Nominal	Maximum
Standard	2,0	3,0
Pointing Accuracy		±0,05 mm

Materials and Plating


Plunger	see tip style
Barrel	Bronze, gold plated
Spring	Music wire, gold plated

Accessories

Connecting element	H025AE
--------------------	--------

Drill size (mm)

Barrel-Ø	0,41 - 0,43
----------	-------------

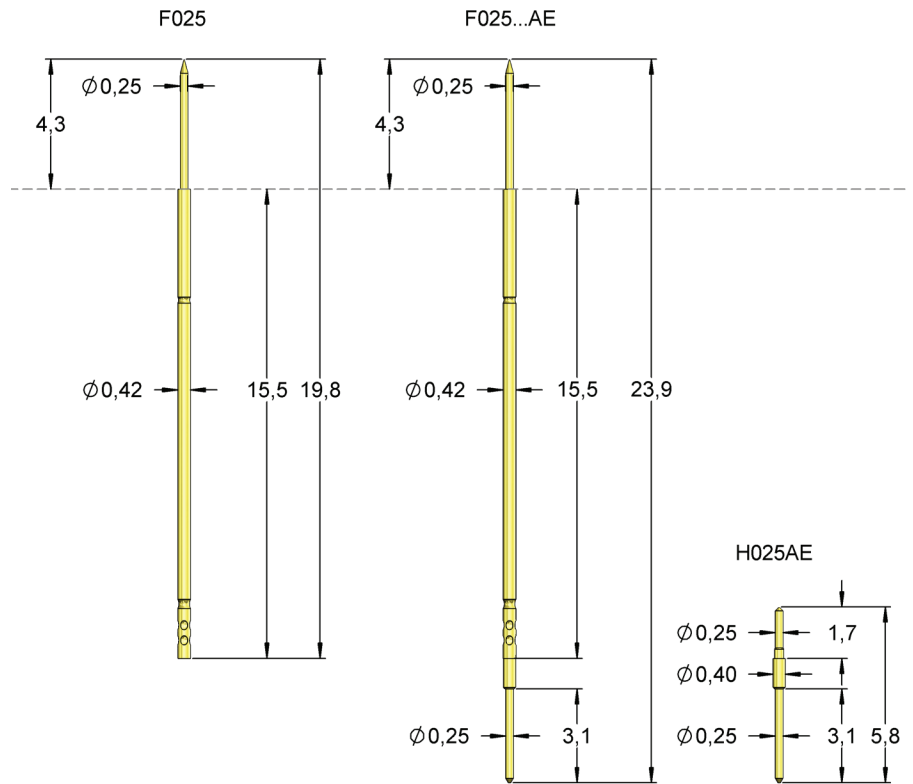

The AE variant is the combination of F025 and H025AE.

Series	Tip-Ø	Spring Force (cN)
F025	18 B 025	G 040 AE
Tip Style	Material	Plating
	Version	

Material: B = BeCu
Tip-Ø: 025 = 0,25 mm (e.g.)
Plating: G = Gold plated
Receptacle: Order Code according drawing

Tip Style	Number	Material	Ø in mm	Plating	Version
	18	B	0,25	G	-
	18	B	0,25	G	AE