



F030

NEW

Probe 30 mil Standard

Centers (mm/mil)	0,76 / 30
Current	1,5 A
R typ	150 mOhm
Temperature	-45°C...+100°C

Spring Force (cN ±20%)

Version	Preload	Nominal
Standard	35	80

Travel (mm)

Version	Nominal	Maximum
Standard	2,0	3,5
Pointing Accuracy		±0,05 mm

Materials and Plating


Plunger	see tip style
Barrel	Bronze, gold plated
Spring	Music wire, silver plated

Accessories

Connecting element	H031AE
--------------------	--------

Drill size (mm)

Barrel-Ø	0,61 - 0,63
----------	-------------

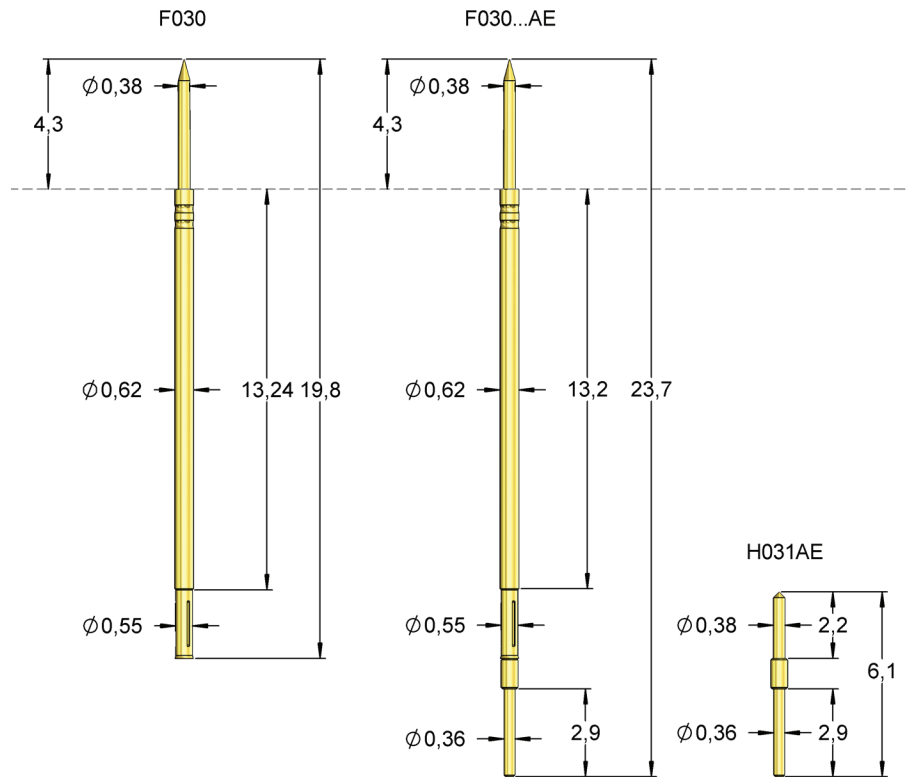

M 1:1



The AE variant is the combination of F030 and H031AE.

Series	Tip-Ø	Spring Force (cN)
F030 18 E 038 M 080 AE		
Tip Style	Material	Plating
Version		

Material: E = Stainless steel
Tip-Ø: 038 = 0,38 mm (e.g.)
Plating: M = Multiplex coating
Receptacle: Order Code according drawing

Tip Style	Number	Material	Ø in mm	Plating	Version
	18	E	0,38	M	-
	18	E	0,38	M	AE