

# HIGH CURRENT PROBES

## F713C

**High Current Probe 138 mil Short Version, up to 25 A, Plug-in**

<b>Centers (mm/mil)</b>	3,50 / 138
<b>Current</b>	25,0 A
<b>R typ</b>	<8 mOhm
<b>Temperature</b>	-40°C...+200°C (H)

### Spring Force (cN ±20%)

Version	Preload	Nominal
C	60	150

### Travel (mm)

Version	Nominal	Maximum
C	2,8	3,5

Pointing Accuracy ±0,10 mm

### Materials and Plating

Plunger	see Tip Style
Barrel	Brass, gold plated
Spring	Stainless steel, unplated
Receptacle	Brass, gold plated

### Accessories


Insertion tool receptacle	FEWZ-772E0
Insertion tool probe	FDWZ-100

### Drill Size (mm)


H713LA	2,98 - 2,99
--------	-------------

### Projection Height (mm)

H713LA mit F713...C	7,3
---------------------	-----

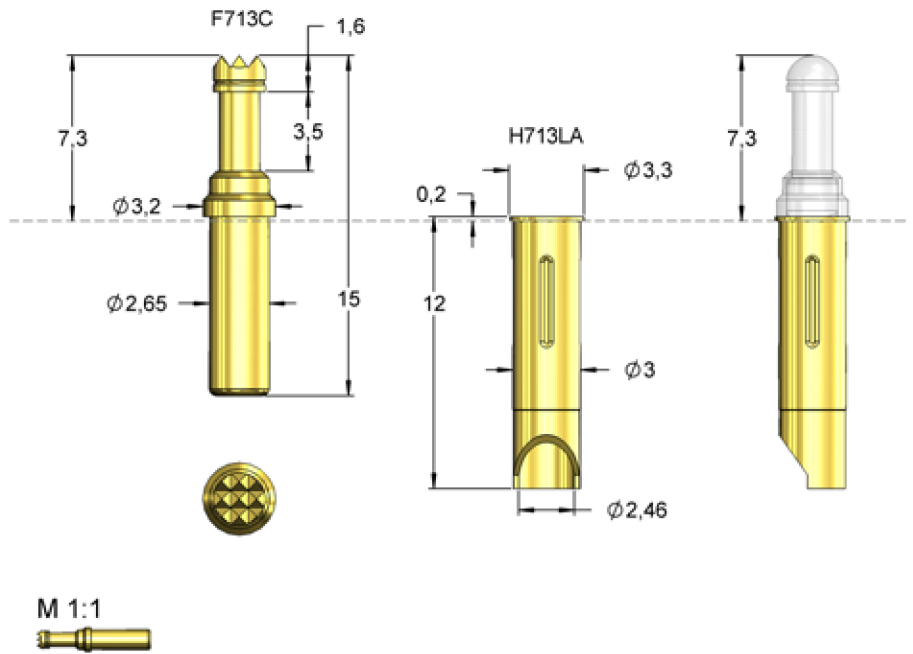

For high current applications at limited space.

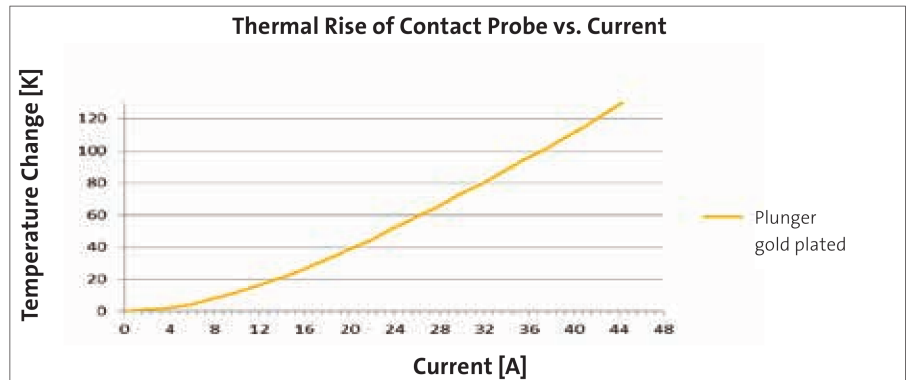

Series	Tip-Ø	Spring Force (cN)
<b>F713 06 B 230 G 150 C</b>		
Tip Style	Material	Plating
Version		

**Material:** B = BeCu  
**Tip-Ø:** 230 = 2,30 mm (e.g.)  
**Plating:** G = Gold plated  
**Version:** C = High Current Version  
**Receptacle:** Order code according drawing

Tip Style	Number	Material	Ø in mm	Plating	Version
	06	B	2,30	G	C
	12	B	2,30	G	C
	14	B	2,30	G	C