



Grid:
≥ 2,54 mm
≥ 100 Mil

Installation height with KS: 14,7 - 21,6 mm (.579 - .850)
Recommended stroke: 4,0 mm (.157)

Mounting and functional dimensions

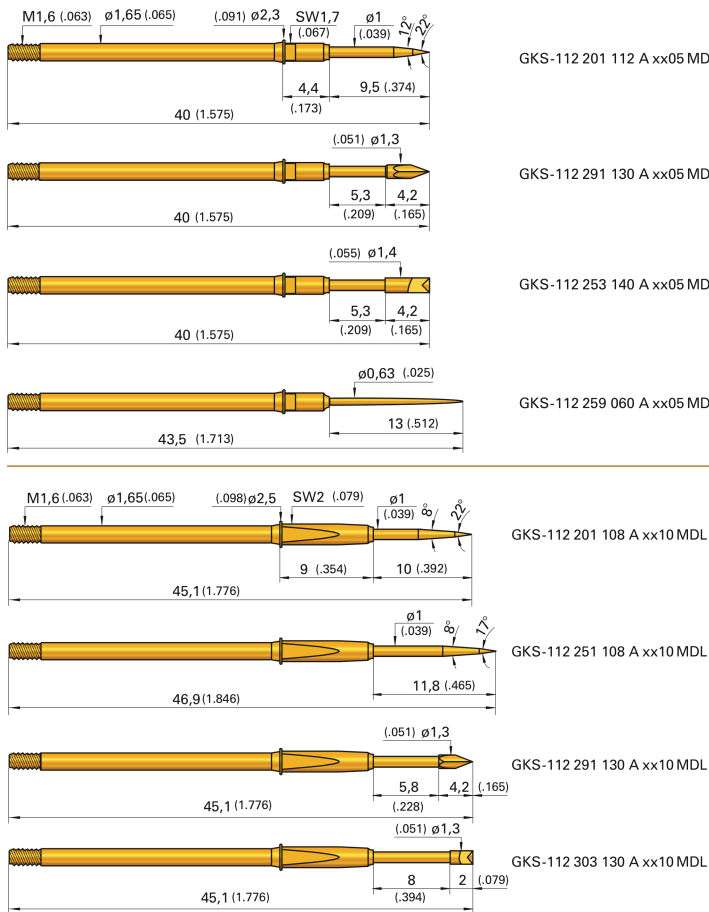

Type	Oper. stroke in mm (inch)	Max. stroke in mm (inch)	Inst.-height with KS in mm (inch)
01...05 MD	4,0 (.157)	8,0 (.315)	14,7 (.579)
91...05 MD	4,0 (.157)	5,3 (.209)	14,7 (.579)
53...05 MD	4,0 (.157)	5,3 (.209)	14,7 (.579)
59...05 MD	4,0 (.157)	8,0 (.315)	18,2 (.717)
01...10 MDL	4,0 (.157)	8,0 (.315)	19,8 (.780)
51...10 MDL	4,0 (.157)	8,0 (.315)	21,6 (.850)
91...10 MDL	4,0 (.157)	5,8 (.256)	19,8 (.780)
03...10 MDL	4,0 (.157)	8,0 (.315)	19,8 (.780)

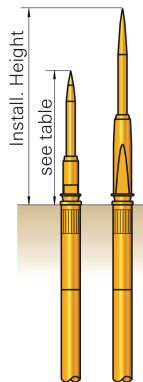

Available tip styles version GKS-112 ... 05 MD

Material	Tip style	Plating	Further versions	
			ϕ	ϕ (inch)
2 01		A	$\phi 1,12$ (.044)	
2 91		A	$\phi 1,30$ (.051)	
2 53		A	$\phi 1,40$ (.055)	
2 59		A	$\phi 0,60$ (.024)	

Available tip styles version GKS-112 ... 10 MDL

Material	Tip style	Plating	Further versions	
			ϕ	ϕ (inch)
2 01		A	$\phi 1,08$ (.043)	
2 51		A	$\phi 1,08$ (.043)	
2 91		A	$\phi 1,30$ (.051)	
3 03		A	$\phi 1,30$ (.051)	

Note:
GKS-112 ... MD and MDL is screwed in KS-112 ... M, shown on page 125.
Recommended screw-in torque:
Min.: 3 cNm / Max.: 5 cNm

Electrical data
Current rating: 5 - 8 A
R_i typical: < 20 m Ω

Operating temperature
Standard: -40° up to +80° C

Mounting hole size
for KS-112 xx M and KS-112 xx M-T in CEM1 and FR4: $\phi 1,98 - 1,99$ mm (.0780 - .0783)
for KS-112 xx M-R in CEM1 and FR4: $\phi 2,00 - 2,02$ mm (.0787 - .0795)

Materials
Plunger: Steel or BeCu, gold-plated
Barrel: Brass, gold-plated
Spring: Steel, gold-plated
Receptacle: Brass, gold-plated

Mechanical data
Spring force at work, stroke: 1,5 N (5.4oz)
Alternative: 0,6 (2.2oz); 0,8 (2.9oz); 2,25 (8.1oz); 3,0 N (10.8oz)

Ordering example

Series	Tip material	Tip style	Tip diameter	Plating	Spring force	Collar height	Special designation alternative
	2 = Steel 3 = BeCu		(1/100 mm)	A = Gold	(dN)	(mm)	"MDL"

Test probe:

G K S 1 1 2 2 0 1 1 1 2 A 1 5 0 5 M D

Receptacles (shown on page 125):

K S - 1 1 2 3 0 M - T K S - 1 1 2 3 0 M - R

Receptacles for leakage test (shown on page 125):

K S - 1 1 2 3 0 M

Screw-in tool for GKS-112 ... 05 MD:

B I T - G K S 1 1 2 M - B

Screw-in tool for GKS-112 ... 10 MDL:

B I T - G K S 1 1 2 M - B - F P