

HSS 624 M

Dipole Probe up to 100 A

NEW

Grid:




≥ 7,60 mm

≥ 300 Mil

Installation height with KS: 10,8 mm (.425)

Recommended stroke: 4,4 mm (.173)

Mounting and functional dimensions

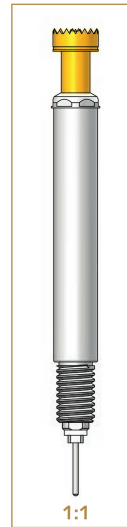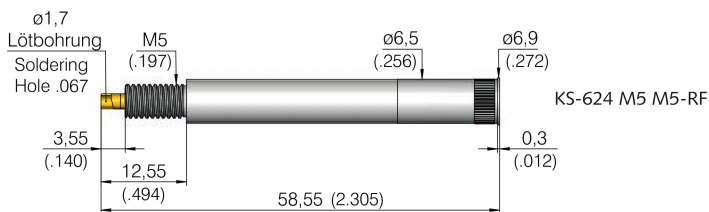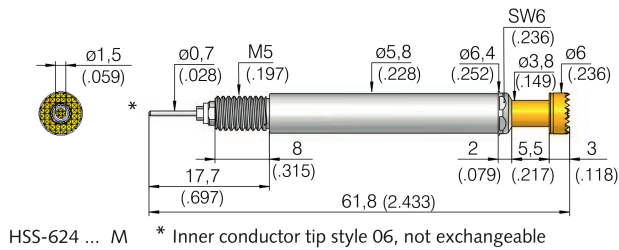

Note:

The new screw-in dipole probe **HSS-624 M** is a market-driven development for simultaneously transferring high currents and carrying out a voltage measurement directly on the contact pads (4 pole measurement).

Due to the design and the small internal resistance, currents of up to 100 A can be safely and reliably transferred in small spaces. (grid size 300 Mil = 7,6 mm (.299).

Materials

Plunger:	BeCu, gold-plated
Barrel:	Brass, silver-plated
Spring:	Stainless steel
Receptacle:	Brass, silver-plated

Operating temperature

Standard: -100° up to +200° C

Mounting hole size

for KS-624
in CEM1 and FR4: Ø 6,50 - 6,52 mm
(.2559 - .2567)



Recommended tightening torque

HSS-624 M in KS-624: 40 cNm
Cable at KS-624: 2 Nm

Electrical data


Current rating (at room temp.)

- outer conductor:	max. 100 A
- inner conductor:	max. 1 A
R _i typical outer conductor:	< 5 mΩ
R _i typical inner conductor:	< 20 mΩ

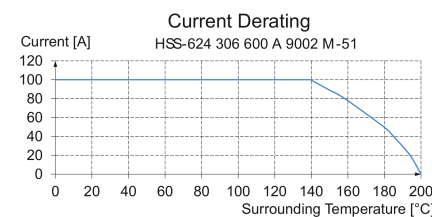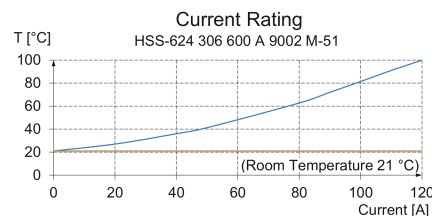

Mechanical data

Working stroke:	4,4 mm (.173)
Max. stroke:	5,5 mm (.217)
Spring-force at work. stroke:	9,0 N (32.5oz)

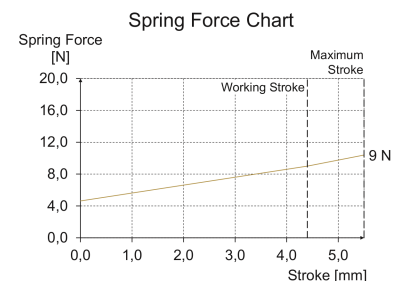

Ordering example

Series	Tip material 3 = BeCu	Tip style	Tip diameter (1/100 mm)	Plating A = Gold S = Silver	Spring force (dN)	Collar height (mm)	Type
Test probe:	HSS	624	306	600	A	90	M-51
Receptacle for HSS-624 M:	KS-624	M5	M5-RF				